

A4AL

Desiccant Filling Machine for Profile Bars

LiSEC

CREATING VISIONS. PROVIDING SOLUTIONS.



The special design of the multiple filling head allows filled profiles to be removed, and empty profiles to be inserted during the filling process while preventing desiccant spills. The spacer support, which is at 45 degrees and has a spring clamp, enables the simultaneous filling of several profile bars of varying widths.

Highlights

- Material supply via gravity-vibration system
- Sight glass to monitor filling volume
- Closed filling system
- Also available with suction supply system that supplies desiccant directly from 200-liter drums


Technical data

and models

LiSEC

CREATING VISIONS. PROVIDING SOLUTIONS.

Profile types	aluminum, steel, stainless steel, plastic
Profile width	6 - 24 mm
Profile height	6 - 8,5 mm
Profile length	50 - 2500 mm

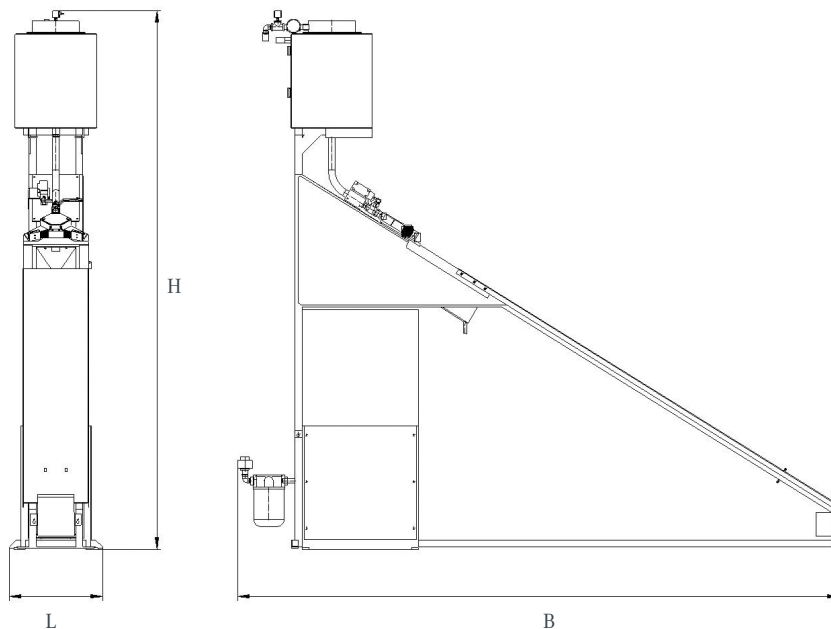

	L (mm)	B (mm)	H (mm)	Operating air pressure (bar)	Air consumption (l/min)
A4AL	450	2400	2400	6	130